



DESIGNED FOR EDUCATION | **MX880UST**
 Future Proof • Excellent Image Quality • Affordable



Features

- Native XGA (1024 x 768) Resolution
- 2500 ANSI Lumens, 3000:1 Contrast Ratio
- 0.3 Ultra Short-Throw Ratio
- LAN Control/Display, USB Reader/Display
- Wireless Display (Optional), 20W Speaker

Top / Front




Top



Front

Input and Output Terminals

Back

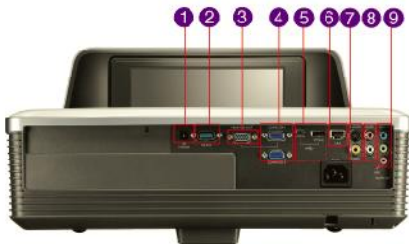

- | | |
|-------------------------|---------------------------------|
| ① 12V Trigger x1 | ⑥ RJ45 x1 (LAN Control/Display) |
| ② RS-232 x1 | ⑦ S-Video/Video x1 |
| ③ RGB Output x1 | ⑧ Audio R/L x1 |
| ④ RGB In/Component x2 | ⑨ Audio In & Out / Mic-In |
| ⑤ USB Type A and Mini-B | |

Specifications

EDUCATION

Native Resolution	XGA(1024 x 768)
Brightness	2500 ANSI Lumens
Contrast Ratio	3000:1 (Full on/Full off)
Keystone	Manual Vertical +/- 15°
Aspect Ratio	4:3 Native, 16:9 Selectable
Zoom Ratio	Fixed
Color	Full 1.07 Billion colors palett
Image Size (Diagonal)	60" - 300"
Throw Ratio	0.3:1 (78" @ 1.69 Feet)
Lamp Life	230W, 3500/5000 hours (Normal/Economical Mode)
PC Compatibility	VGA (640 x 480) to UXGA (1600 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-98 kHz
Vertical Scan Rate	48-120 Hz
Input Terminals PC/AV	Analog RGB/Component: D-Sub 15 Pin x2 LAN Networking: RJ45 x1 (LAN Display) USB (Type A) x1 (Reader) USB Type Mini B x1 (Display) S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Microphone-In: Mini-Jack x1 Audio L/R: RCA x2 Audio Stereo Mini-Jack x1
Output Terminals PC/AV	Analog RGB: D-Sub 15 Pin x2 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W x2 / 12V Trigger x1
Control Terminals	Serial Connector: RS-232 9 Pin (Male) USB Type Mini-B (Download and page up/down) RJ45 (LAN Control)
Dimensions (W x H x D)	15.9" x 9.01" x 12.7"
Weight	12.1 lbs (5.5 kg)
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	315W (Typical), Standby <1W
Noise Level	33/27 dBA (Normal/Economical Model)
Display Languages	Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese
Picture Mode	Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode
Functions	0.3 Throw Ratio/3D-Ready/LAN Control & Display/USB Display & Reader/Built-In 20W Speaker and Microphone-In/ Digital Zoom x2/Closed Captioning/Quick Cooling/Panel Lock/Window 7 Compatible/Wireless Display (Optional)
Accessories (Standard)	User Manual (CD)/Power Cable/Quick Start Guide/Batteries/ Remote Control/D-Sub Cable
Accessories (Optional)	Spare Lamp Kit/Wireless Dongle/0.3 Wall Mount
Lamp P/N	5JJ3A05.001
Limited Warranty	3-Years Parts/Labor / 1-Year or 2000 hours of lamp life



BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

MX880UST-EDU011911-US

BenQ America Corp.

15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 • Tel: (949) 255-9500 • www.BenQ.us