PXE-DCM
Pixie™ Device Control Module

Single-gang IR control system for projectors and display devices.

PXE-DCM-BLUE with
Decora Wall Plate (not included)

PXE-DCM-GREEN Horizontal with
Decora Wall Plate (not included)

PXE-DCM-AMBER with
Decora Wall Plate (not included)

▼ *Single-Gang form factor*

▼ *Learns IR codes from almost any remote*

▼ *Wireless cloning allows quick programming of many units*

PXE-DCM
Pictured with Leviton Decora™ wall plate (not included).
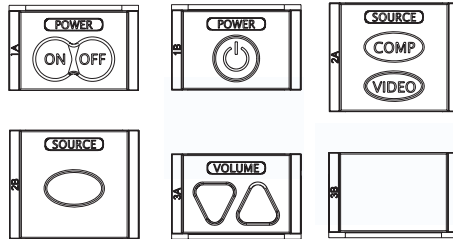
▼ *Power, Source, and Volume Control*

▼ *Elegant backlit LEDs in a variety of colors*

▼ *A single button may be programmed with multiple remote codes*

FEATURES

The Pixie Device Control Module provides a simple, standardized control interface for projectors, monitors, and display devices in a compact single-gang form factor.

A CUSTOMIZABLE INTERFACE WITH A VARIETY OF BUTTON MODULES make the Pixie compatable with nearly any display device available.

Choose the three insert module options that match your remote control design.

EASY TO INSTALL The single-gang Pixie fits in a standard wall box with a Decora™ wall plate(not included). Athree-conductor cable between the Pixie and the projector or display device carries power and IR to a pre-fabricated cable assembly. The Pixie can power several emitters to control multiple devices.

EASY TO CONFIGURE WIth IR learning, the Pixie can learn the remote control of your display device in minutes. No programming is necessary, so leave the laptop at home.

DUPLICATE ROOMS ARE A SNAP Simply teach one Pixie the codes from the remote control, and any other Pixie will wirelessly clone its configuration in seconds.

AVAILABLE IN DIFFERENT COLORS Button insert modules available in blue, green, or amber plastic with matching backlit LEDs. Bezels availble in different colors to match Decora plates for room aesthetics.

Simple.
Intuitive.
Control.

SP Controls, Inc.
930 Linden Avenue
South San Francisco
California 94080
phone: (877) 367-8444
fax: (650) 392-7881
email: help@spcontrols.com

TECHNICAL SPECIFICATIONS

Package Type:	Single-Gang Decora Mounting
Dimensions:	4.130" (h) x 1.745" (w) x .90" (d)
Weight (PCB with bezel and 3 insert modules):	2.5 oz
Power Supply:	6VDC, 300mA
Output Type:	IR Emitter
Outboard Current-Limiting Resistor (IR Emitter):	150 ohm
Recommended Wire:	18- to 22-Gauge Shielded